

12450
[40'-10"]

Feed hopper 4m3

Crusher C96

Engine unit

Magnetic separator (optional)

Main Conveyor H8-9

Feeder
TK9-32-2V

Conveyor H5-3
(optional)



2636
[9']
2813
[9'-3"]
3100
[10'-2"]

1960

MASS CENTRE

3325
[10'-11"]

2500
[8'-2"]

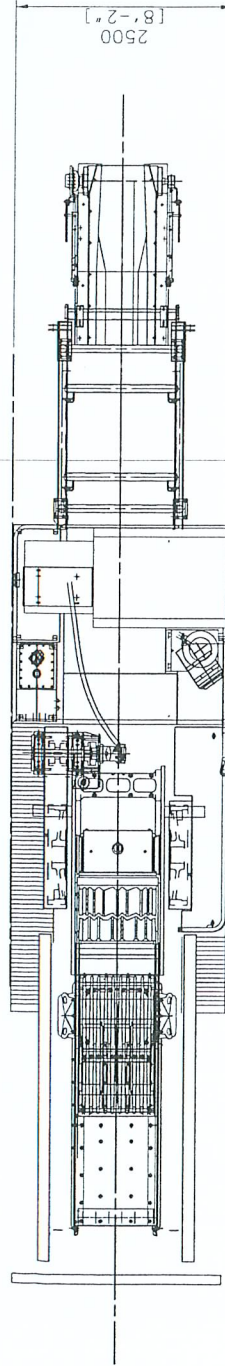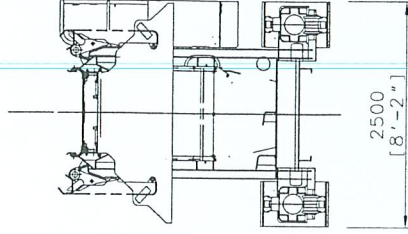

WEIGHT WITH DEFAULT OPTIONS 28100 kg/62000 lbs
NOTE: DRAWING WITH DEFAULT OPTIONS AND SIDE CONVEYOR,
MAGNETIC SEPARATOR

REV	DESCRIPTION OF CHANGE	LOC	BY	DATE	TYPE
0					INITIAL
1				27.08.10	MOD
DESCRIPTION OF CHANGE					
PROJECT					
DRAWING NAME					
TRANSPORT DRAWING					
TRANSPORT DRAWING					
DRAWING NUMBER					
MM03.31083					
SUFFIX					
REV					
0					

3.2 HAUPTABMESSUNGEN BEI STANDARD AUSSTATTUNG

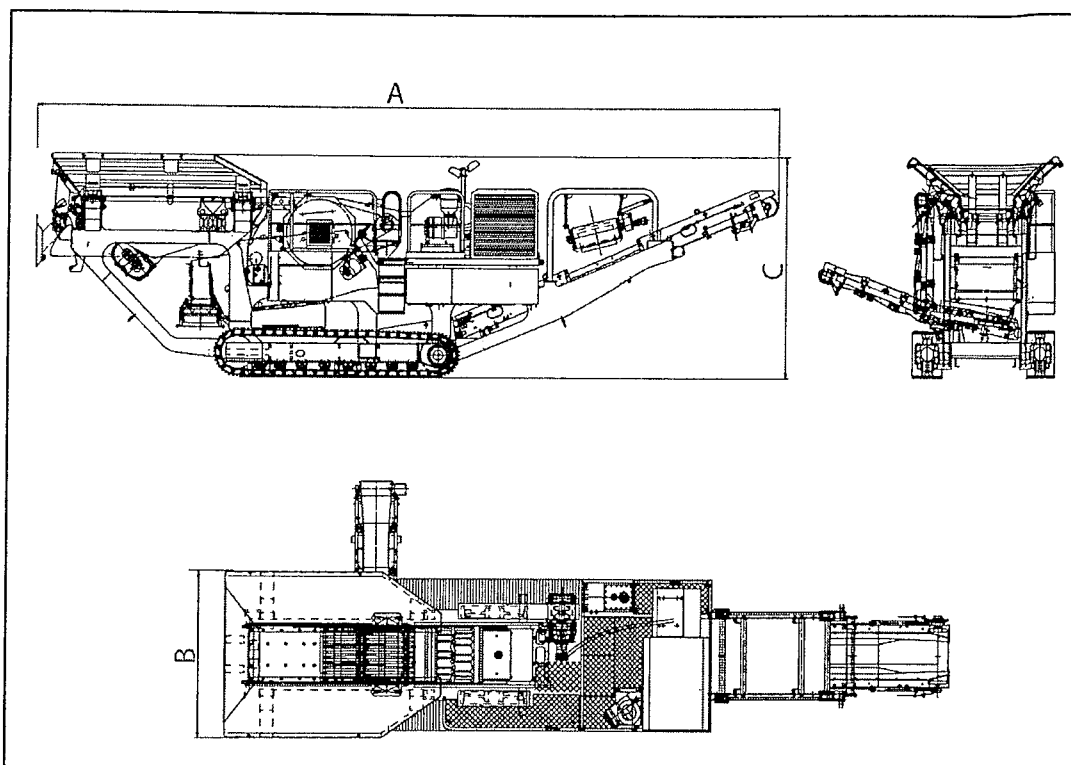


Abbildung 3-1 LT96 in Betriebsposition

Tabelle 3-1 Hauptabmessungen in
Betriebsposition

	LT96	LT96S
Länge A	Standard-Förderer 12.450 mm (40' - 10")	14 800 mm (48' - 7")
Breite B	2 500 mm (8' - 2")	5 300 mm (17' - 5")
Höhe C	3 600 mm (11' - 10")	3 600 mm (11' - 10")
Gewicht	29 000 kg (64.000 lbs)	32 500 kg (71.700 lbs)

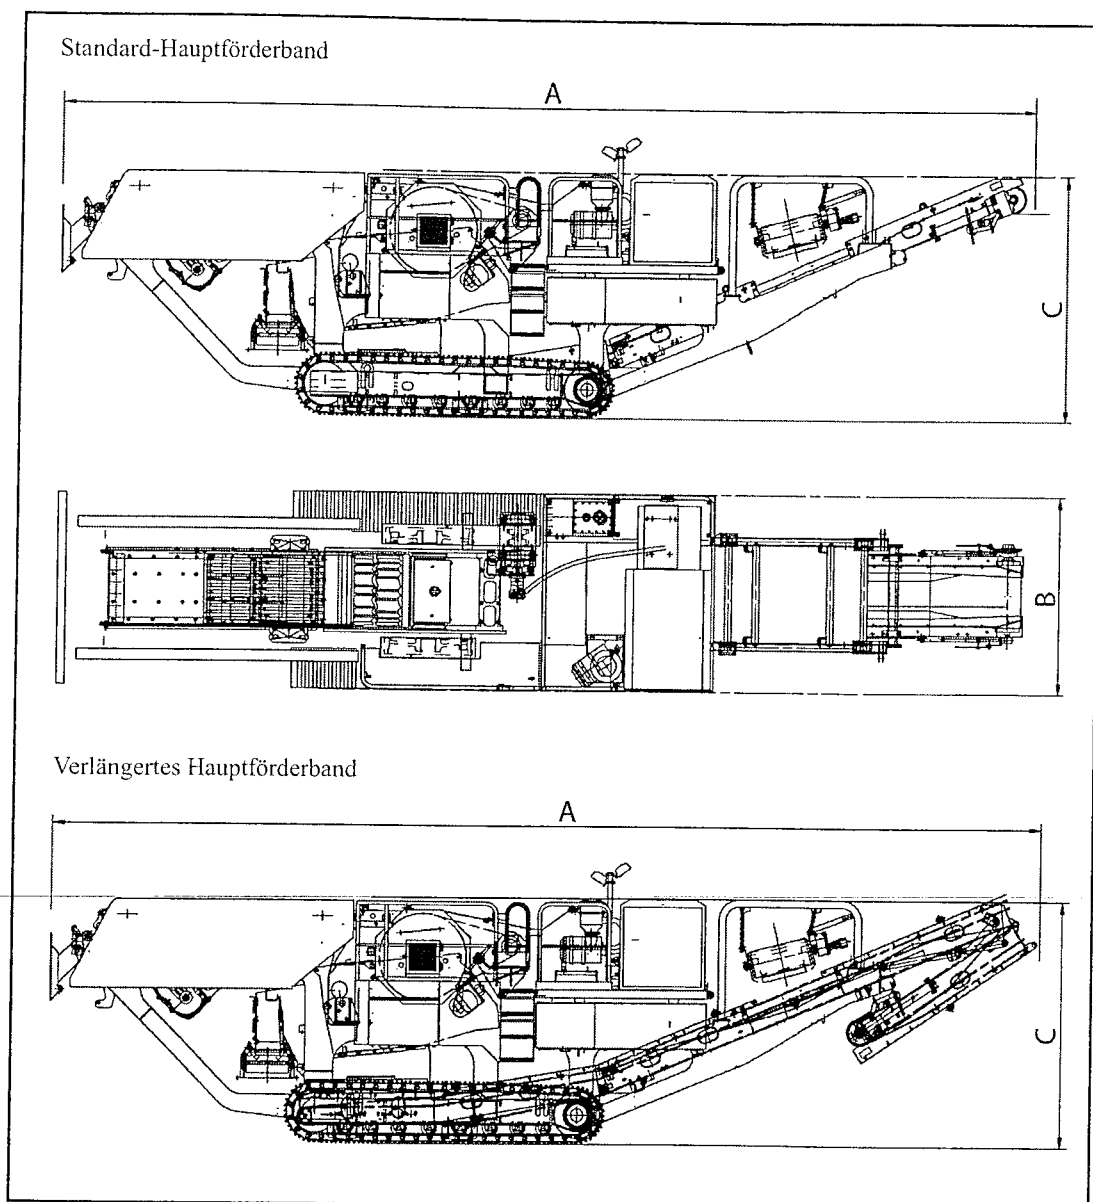


Abbildung 3-2 LT116 in Transportposition

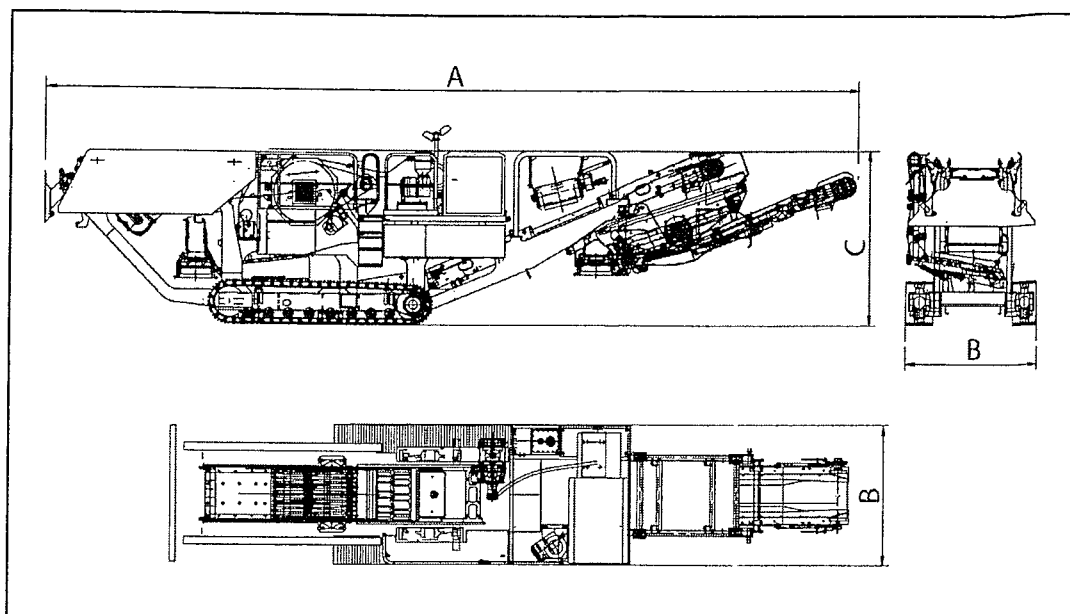


Abbildung 3-3 LT96S in Transportposition

Tabelle 3-2 Hauptabmessungen in Transportposition

	LT96	LT96S
Länge A	Standard-Förderer 12.450 mm (40' - 10") Verlängerter Förderer 12.650 mm (41' - 6")	14 800 mm (48' - 7")
Breite B	2 500 mm (8' - 2")	2 500 mm (8' - 2")
Höhe C	3 100 mm (10' - 2")	3 100 mm (10' - 2")
Gewicht	29.000 kg (64.000 lbs)	32 500 kg (71.700 lbs)